
LEOPARD 2 A8
The world's leading main battle tank
KNDS

/ LEOPARD 2 A8
The world's leading main battle tank



Key Features

- Digital Fire Control System
- Digital CDR's periscope with laser range finder
- Thermal Imaging Systems with advanced sensors
- Upgraded Modular Protection for chassis and turret
- Upgraded Roof Protection
- 360° protection with Active Protection System TROPHY
- Crew compartment cooling unit turret and chassis up to 10 kW
- Auxiliary Power Unit 20 kW with stabilising ultracaps
- Enforced running gear
- Improved cooling unit power pack
- Cross-sectional User Interface with Scenario Adapted Mission System
- Prepared for mine protection (Optional: Heavy Mine Protection Module)
- Optional: Laser Warner


Technical Data


Weight	< 69.5 t (configuration dependent)
Length	8.05 m (11.17 m with gun)
Width	3.80 m
Height	2.72 m (turret roof), 3.13 m (PERI)
Engine power	1,100 kW (1,500 hp)
Maximum speed	60 km/h (road)
Range	~ 400 km (road)
Ground clearence	500 mm
Crew	4

Armament

Main weapon	120 mm L55 A1
Secondary armament	Coax MG 7.62 mm Multi-purpose grenade launcher 76 mm

User Nations:

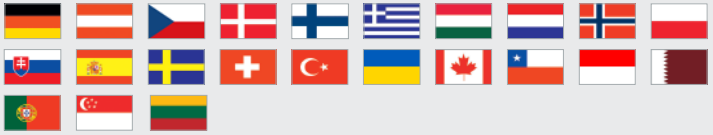

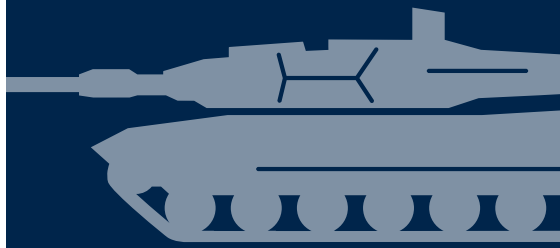

KNDS

KNDS Deutschland GmbH & Co. KG
Krauss-Maffei-Str. 11
80997 Munich, Germany
Fon: +49/89/8140 50
Fax: +49/89/8140 4900
Mail: info@knds.de
Web: www.knds.com

Unless otherwise indicated, all products are registered trademarks of KNDS Deutschland GmbH & Co. KG. Property of KNDS. All rights reserved.
25EN | 0108B01